




Oak 3x

4122603


1 Watt On/Off 5000 Failure < 5% after 1000h
 35 Lumen Non dimmable Failure < 10% after 6000h
 3000 Kelvin Instant full light Flux > 80% after 6000h
 10.000 Hours Power factor > 0,5 CRI > 65

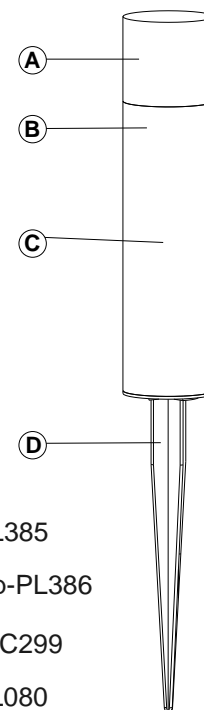


- A - Glass-PL385
- B - Inner cup-PL386
- C - Frame-AC299
- D - Spike-PL080

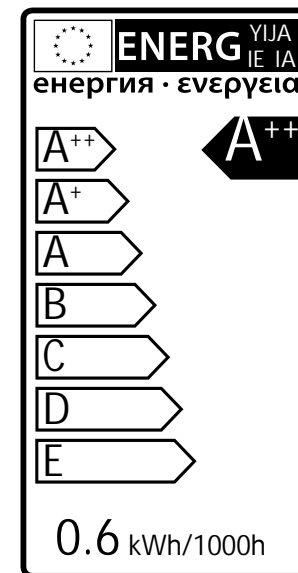


SMD LED unit 3x
 12V 1W GU5.3
 warm white
 Art. nr.1167101



Main cable 8m SPT-1W with 4 screw outlets



For use with IP44 socket
 PRI.: 100-240V~50/60Hz □
 SEC.: 12Vdc Max: 12W
 IP44 housing



For use with IP44 socket
 PRI.: 100-240V~50/60Hz □
 SEC.: 12Vdc Max: 12W
 IP44 housing

Garden Lights

MI8060 - 20190314

Garden Lights

